



FGS  
METALWORK

FGS  
STRUCTURAL

THE  
FENCE & GATE  
SPECIALIST

# MANUAL RELEASE PROCEDURE

## TOUSEK T24 / T8

In case of a power failure or other defect the drive pinion can be disengaged from the gearmotor as follows:

- Switch off power supply



- Slide key-cover (A) slightly to the front and turn it away. Insert the key and turn it clockwise to its limit stop (the emergency release mechanism can be key-locked both in the engaged and in the disengaged position).
- Turn the handle 180° counter-clockwise (viewed from above). The gate can now be manually opened or closed.

*Re-engaging the emergency release mechanism:*

To return to normal motor operation please turn the handle back to its original position (i.e. 180° clockwise)




### Important

- after the handle is back in normal position, slowly move the gate manually in its travel direction until you can hear that the gearing has re-engaged!

Then lock it again and remove the key.

*With next command the motor searches the open position (a new learning of end positions is not necessary).*

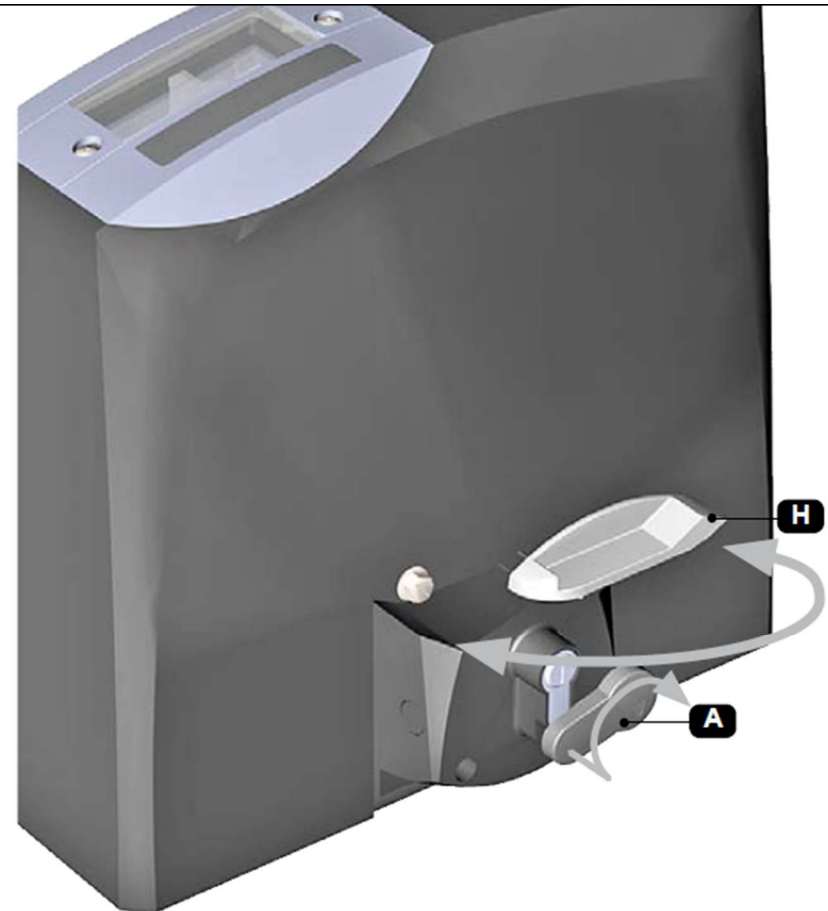

Handle in picture shows unlocked position