



FGS
METALWORK


FGS
STRUCTURAL

THE
FENCE&GATE
SHOP

MANUAL RELEASE PROCEDURE

- TOUSEK TSA

In case of a power failure or other defect the motor can be disengaged from the gearmotor as follows::

- Switch off power supply 
- Slide key-cover (A) slightly to the front and turn it away. Insert the key and turn it clockwise to its limit stop (the emergency release mechanism can be key-locked both in the engaged and in the disengaged position).
- Turn the handle 180° counter-clockwise (viewed from above). The gate can now be manually opened or closed.

Re-engaging the emergency release mechanism:
To return to normal motor operation please turn the handle back to its original position (i.e. 180° clockwise)




Important !

- after bringing the handle is back in normal position, slowly move the gate manually in its travel direction, until you can hear that the gearing has re-engaged!

Then lock again and remove the key.

With the next impulse the motor searches its open position (do not need to programm the end positions again).

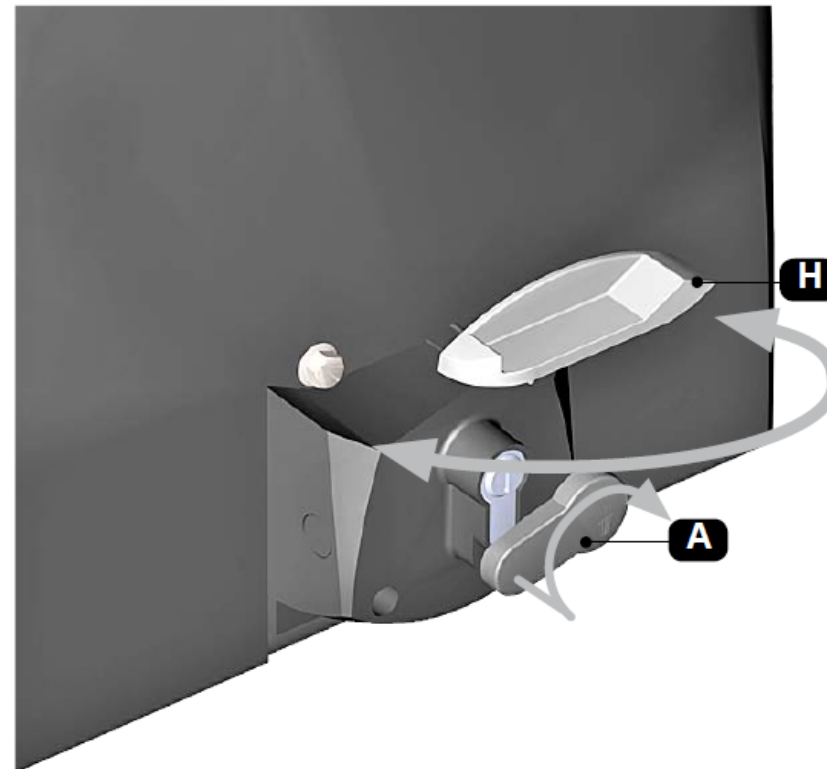

The handle in picture shows the unlocked position